

NEW! Household grease under the sink series "Optima".

Grease series "Optima" used in small cafes , restaurants , kitchens and cutting shops supermarkets .
Also, the grease can be installed in apartments , country houses and cottages .

*The grease separators of the "Optima" series are manufactured in series according to the registered **TU 29.2-32306957-002: 2009**.*

Dimensions:

Length - 450mm Width - 340mm Height - 350mm


The diameters of the pipes - 50mm

Productivity - 0.5 m³ / h (0,145 l / s)

Rated peak discharge - 25L



Schematic diagram of the grease trap series "Optima" :

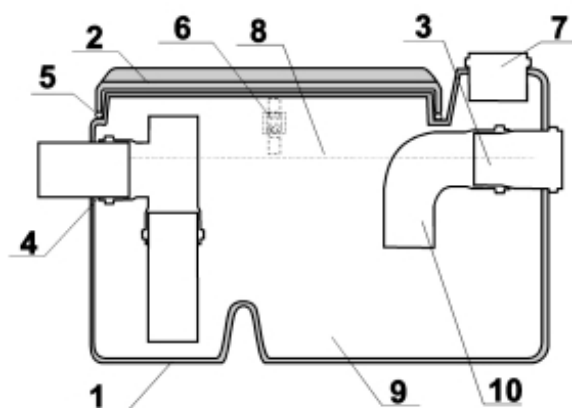

1. Cast housing
2. Cover
3. Inlet (can be additionally equipped with tap)
4. Outlet
5. Sealing gum
6. Metal latch
7. Connection for ventilation
8. Zone fat collection
9. Zone collection of sludge (sludge)
10. Stream absorber knee.

The kit grease series SG "Optima" also includes plug diameter 50mm , in case the grease is not connected directly to the ventilation system and installed in a well ventilated area , and can also be sewer couplings (2 pieces) with a diameter of 50mm , in the case of straight pipes (without sockets) for connection to the sink and ventilation system. (Recall that according to the norms and the operating instructions , grease installed inside buildings should be connected to the ventilation system.)



Grease series "Optima" is available in two models SG 0,5-0,04 "Optima" and SG 0,5-0,04 "Optima"-F.

Model SG grease 0,5-0,04 "Optima"-F is equipped with fasteners for installation of replacement filter bags (FB- 1) . These packages are similar to those used in the models of grease traps SG 0,5-0,045-F and SG 0,5-0,06-F our production . The kit grease SG 0,5-0,04 "Optima"-F is composed of five filter bags (one preinstalled and 4 pieces per pack) .

Advantages of "Optima" series Grease :

- Cast housing with increased wall thickness ;
- In case no shadow areas where dirt can be collected ;
- Inlet from the top (there is a possibility to install grease trap directly under the sink without a siphon , with the grease trap itself can act as a siphon) ;
- The presence of metal clips (along with the gasket provide greater tightness at closing).

Production: POLIMERKOMPLEKT ICE Ltd (Kyiv, Ukraine)

Tel./fax (+38044) 4518918, e-mail: p-k2006@ukr.net www. <https://polimer-komplekt.ua/catalog>